


# ACOUSTI-TACK (ATF)

G&S Acoustics' Acousti-Tack (ATF) wall panels are **excellent sound-absorbing panels and tackboards**. Our functional ATF panels have a compound core of 18 pcf fiberglass facing, laminated to 6-7 pcf fiberglass.

The fiberglass facing sheet gives our ATF panel an **impact-resistant tackboard** with increased sound absorption ability. The 6-7 pcf fiberglass core is the primary source for sound absorption; and it is available in a variety of thicknesses.

Choose ATF panels for locations that require sound-absorbing, impact-resistant tackboards. ATF panels are especially useful in conference rooms, corridors, classrooms, libraries, theatres and high-traffic areas.


## CORE SECTION

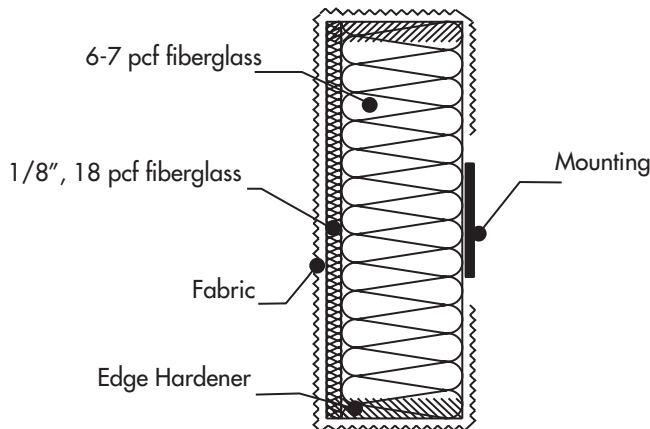

## SOUND ABSORPTION

Hz	125	250	500	1000	2000	4000	NRC
ATF .625	.07	.23	.72	1.02	1.09	1.02	.75
ATF .875	.11	.29	.89	1.07	1.05	.94	.85
ATF 1.125	.27	.61	.98	.98	.93	.94	.90
ATF 1.625	.36	.70	1.13	1.09	1.07	1.00	1.00
ATF 2.125	.56	.92	1.17	1.12	1.11	1.07	1.10
ATF 3.125	.94	1.01	1.21	1.18	1.13	1.08	1.15
ATF 4.125	1.12	1.23	1.33	1.25	1.21	1.18	1.25

Note: Sound absorption is based on using our standard fabric. Results may vary with the use of other materials.

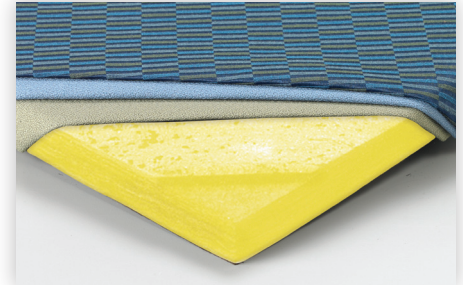

### CORE

Facing: 1/8", 18 pcf fiberglass  
Backing: 6-7 pcf fiberglass,  
5/8"-4-1/8" thick

### SIZES

Custom sizes and shapes up to  
4'x10' and 5'x10'

### MOUNTING

Adhesive, impaling clips,  
two-part Z-clips

### FINISH

Fabric

### EDGES

Square, beveled, radiused  
Chemically hardened

### FLAMMABILITY

All components have a Class "A"  
rating per ASTM E84

*Controlling  
Sound  
Beautifully*